

WATER CHEMISTRY OF LAKE GIŁWA

Jolanta Grochowska, Renata Tandyrak

**Chair of Environmental Protection Engineering
University of Warmia and Mazury in Olsztyn**

Abstract

The study was carried on Lake Giłwa (100.8 ha, 9.4 m), in the drainage basin of the Giłwa and Pasłęka rivers. The data obtained in the study allowed the authors to classify Lake Giłwa as a water body belonging to the third stability degree according to PATALAS (1960). As evidenced in the study, Lake Giłwa is a highly eutrophic reservoir. The lake waters were characterized by a high content of nutrients, up to $1.40 \text{ mg P} \cdot \text{dm}^{-3}$ and $12.47 \text{ mg N} \cdot \text{dm}^{-3}$. The high fertility of the lake was also exhibited by the values of BOD_5 reaching $7 \text{ mg O}_2 \cdot \text{dm}^{-3}$, chlorophyll *a* content ($73 \text{ mg} \cdot \text{m}^{-3}$) and low transparency – 0.7 m. In the peak of the summer, the stagnation oxygen profile is represented by a clinograde curve typical for eutrophic lakes, while carbon dioxide distribution in the water column is shown by a „reverse” clinograde curve, also typical for fertile reservoirs.

The study has revealed that the water in Lake Giłwa is well buffered, as shown by the alkalinity values, $2.5\text{-}5.0 \text{ mval dm}^{-3}$. Total hardness of the reservoir water varied from 157.1 to $278.8 \text{ mg CaCO}_3 \cdot \text{dm}^{-3}$, which is typical of hard water. The hardness was conditioned mainly by the calcium content. With the River Giłwa, the lake receives wastewater from the wastewater treatment plant in Gietrzwałd, which is manifested, for example, by the high values of electrolytic conductivity ($321\text{-}476 \text{ } \mu\text{S} \cdot \text{cm}^{-1}$), indicating the degree of mineral pollution of the lake. Despite the wastewater input, the amount of chlorides is rather low, $20 \text{ mg Cl} \cdot \text{dm}^{-3}$ at the most.

Key words: lake, nutrients, preliminary production, Secchi disc visibility, eutrophication.

CHEMIZM WÓD JEZIORA GIŁWA

Abstrakt

Badaniami objęto jezioro Giłwa (100,8 ha, 9,4 m) położone w dorzeczu Giłwy-Pasłęki. Pod względem dynamiki wód jest to zbiornik o III stopniu statyczności wg PATALASA (1960). Badania chemiczne wód wykazały, iż jezioro Giłwa jest zbiornikiem silnie zeutrofizowanym. W jego wodach stwierdzono bardzo wysoką zawartość związków biogenicznych – $1,40 \text{ mg}$

Jolanta Grochowska, PhD, Eng., Junior Professor, Chair of Environmental Protection Engineering, University of Warmia and Mazury, Prawocheńskiego 1, 10-957 Olsztyn, Poland, e-mail: jgroch@uwm.edu.pl

$\text{P} \cdot \text{dm}^{-3}$ i $12,47 \text{ mg N} \cdot \text{dm}^{-3}$. O dużej żyzności jeziora świadczą także wartości BZT_5 , dochodzące do $7,0 \text{ mg O}_2 \cdot \text{dm}^{-3}$, ilość chlorofilu *a* (ok. $73 \text{ mg} \cdot \text{m}^{-3}$) i niska przezroczystość wody – 0,7 m. W szczytowym okresie lata zawartość tlenu w wodzie obrazowała krzywa klinogramowa, typowa dla jezior eutroficznych, zaś rozkład dwutlenku węgla w s³upie wody mia³ ksztalt odwrotnej klinogramy, co równie¿ jest typowe dla jezior żyznych.

Badania wykaza³y, ¿e wody jeziora Gi³wa s¹ dobrze zbuforowane, o czym œwiadczy³y wartoœci alkalicznoœci od 2,5 do $5,0 \text{ mval dm}^{-3}$. Twardoœæ ogólna wód tego akwenu zmienia³a siê od 157,1 do $278,8 \text{ mg CaCO}_3 \cdot \text{dm}^{-3}$, co pozwala okreœlaæ jego wody jako twarde. O twardoœci wód decydowa³a g³ównie zawartoœæ wapnia. Za poœrednictwem rzeki Gi³wy do jeziora doprowadzane s¹ œcieki z oczyszczalni œcieków w Gietrzwa³dzie, co uwidacznia siê m.in. w wysokich wartoœciach przewodnoœci elektrolitycznej ($321\text{--}476 \text{ } \mu\text{S} \cdot \text{cm}^{-1}$), wskazuj¹cej na stopieñ zanieczyszczenia wód zwi¹zkami mineralnymi. Pomimo dop³ywu œcieków, w wodach analizowanego zbiornika stwierdzono niewielk¹ iloœæ chlorków – do $20 \text{ mg Cl} \cdot \text{dm}^{-3}$.

S³owa kluczowe: jezioro, zwi¹zki biogenne, produkcja pierwotna, widzialnoœæ kr¹¿ka Secchiego, eutrofizacja.

INTRODUCTION

Lake ecosystems undergo many complex chemical, physical and biological transformations (KUBIAK, TÓRZ 2005). Directions of these transformations are determined by water composition, which in turn is shaped by several factors. Among the most important ones are the geological structure and type of land use in a watershed, capacity of the soil sorption complex, weathering and solubility of minerals present in a watershed, atmospheric conditions, mixing of waters of different composition, and types of aquatic organisms (LETCHER et al. 2002, SCHOONOVER, LOCKABY 2006).

Although the chemical composition of water and trophic condition of most lakes located in Olsztyñskie Lakeland (Pojezierze Olsztyñskie) have been thoroughly analysed, there are still some lakes that have not been examined. Lake Gi³wa in Rentyny is an example of a lake that has not been carefully studied until today. The literature data regarding this water body include morphometric properties and the temperature and DO measurements of September 1962. Therefore, it has been decided, for scientific as well as practical purposes, to elaborate on the collected material concerning the water chemistry of Lake Gi³wa.

The main goal of this paper is to characterize the hydrochemical properties of Lake Gi³wa and its trophic condition.

MATERIAL AND METHOD

Lake Gi³wa is located approximately 20 km west of Olsztyn, in the Gi³wa-Pas³eka Rivers drainage basin. The geographic coordinates are $53^\circ 46' 2\frac{1}{2}''\text{N}$ and

20°14'2½E. To the north the lake is adjacent to the village Rentyny. The lake's axis runs from the north-west to the south-east. The surface area is 100.8 ha and the max. depth is 9.4 m (Table 1, Figure 1). Detailed morphometric parameters are given in Table 1.

Table 1

Detailed morphometric data and lake parameters
(after Institute of Inland Fisheries, Olsztyn, 1964)

Parameter	Values
Water table surface area (ha)	100.8
Maximum depth (m)	9.4
Mean depth (m)	3.7
Relative depth	0.0094
Depth index	0.39
Volume (thousand m ³)	3722.2
Maximum length (km)	2.2
Maximum width (km)	0.6
Elongation	3.7
Shoreline length of the lake bowl (km)	6.8
Shoreline development	1.95

The watershed draining directly to the lake of 1.66 km² surface area is dominated by forests (72.9%). The lake is intensively used for recreation; shores are occupied by recreation centres, camping fields, summer houses and bathing beaches.

Lake Gi³wa is a flow-through reservoir. The Gi³wa River enters the lake in the southern and flows out in the north-western part of the lake. The river feeds the lake with the treated wastewater discharged from the wastewater treatment plant in Gietrzwa³d.

The analyses of the physicochemical properties of the water in Lake Gi³wa were performed three times, on the following dates: November 27, 2007, April 29 and September 3, 2008. Water for analyses was taken from the deepest site in the lake, determined with the help of a bathymetric chart and GPS. Water samples were taken from 1 m depth under the water table and 1 m above the bottom. Simultaneously, temperature and DO were measured at every meter of the water column depth. Water transparency was measured with Secchi disc. Chemical analyses were done in accordance with the methods by HERMANOWICZ et al. (1999).

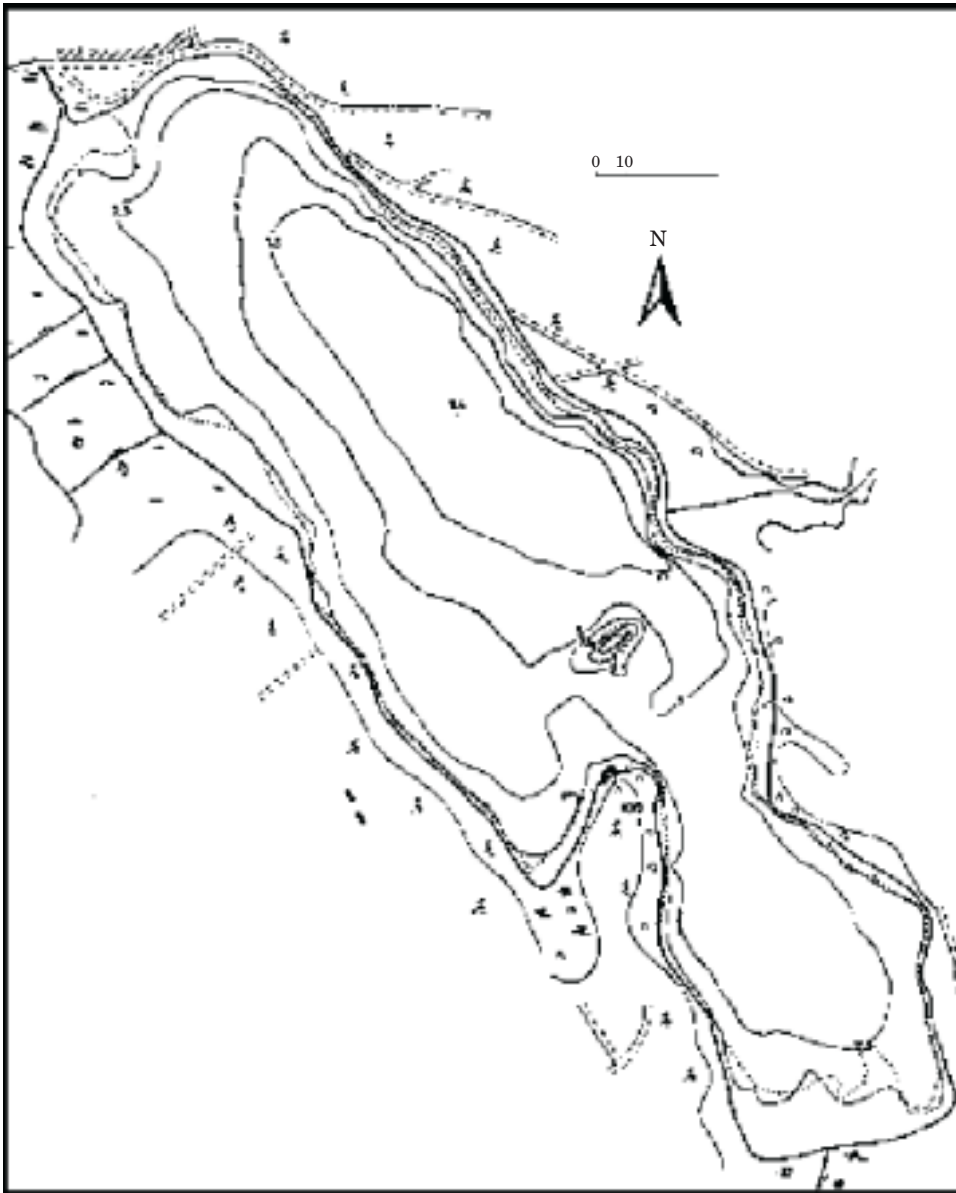


Fig. 1. Bathymetric map of Lake Gi'wa

RESULTS AND DISCUSSION

Lake Gi³wa is not very deep (9.4 m) but relatively large (100.8 ha). To the west, south and partly the east, the lake is surrounded by a forest, which considerably limits the inflow of water to the lake. Moreover, it is a flow-through reservoir, although this lake's characteristic is only weakly evident. Therefore, the intensity of water circulation is determined mostly by the lake's morphometric properties and exposure to wind. The first analysis (November) revealed that the whole water mass circulated at the temperature of 3.8°C. At the end of April, the water column was thermally stratified with a 6.0°C temperature difference between the surface and the bottom (Table 2). In early September, the lake stratified into a 6-m thick epilimnion and a metalimnion of the 3°C·m⁻¹ gradient (Table 2). Based on the measurements taken on September 4, 1962 by OLSZEWSKI et al. (1978), the thermal variability in the water column was assessed as small, 15.7-14.5°C. The theoretical water mixing depth in Lake Gi³wa, calculated after

Table 2

Thermal and oxygen profiles in lake Giłwa

Depth (m)	Autumn		Spring		Summer	
	temperture	oxygen	temperature	oxygen	temperature	oxygen
	(°C)	(mg O ₂ · dm ⁻³)	(°C)	(mg O ₂ · dm ⁻³)	(°C)	(mg O ₂ · dm ⁻³)
0	3.8	9.6	13.6	18.2	18.7	10.7
1	3.8	9.8	13.6	16.2	18.7	10.2
2	3.8	9.8	13.0	15.0	18.5	9.6
3	3.8	9.8	11.0	14.4	18.4	9.4
4	3.8	9.8	10.4	12.6	18.2	8.0
5	3.8	9.8	8.8	10.1	17.8	4.8
6	3.8	9.8	8.8	10.6	17.2	2.2
7	3.8	9.8	8.4	6.9	14.2	0.0
8	3.8	9.8	8.0	6.4	11.5	0.0
9	3.8	9.6	7.6	4.8	9.3	0.0

PATALAS (1960) from the empirical equation $E = 4.4 \sqrt{D}$, is 5.2 m. The study shows that it is 0.8 m lower than the actual thickness of the epilimnion observed at the end of the summer. Taking into account the criteria given by PATALAS (1960), Lake Gi³wa can be classified as belonging to the 3rd static degree, whereas OLSZEWSKI et al. (1978) described the lake as having the ability to create weak strata.

Oxygenation of the lake water depended on the season. Oxygen content in the autumn was similar in the whole water column and equalled 9.8 mg

$O_2 \cdot dm^{-3}$ (74.1% saturation) – Table 2. At the end of April, oxygen content in the surface water layer was high, $16.2 \text{ mg } O_2 \cdot dm^{-3}$ (173.8% saturation) with $4.8 \text{ mg } O_2 \cdot dm^{-3}$ (39.9% saturation) near the bottom (Table 2). In the peak of the summer stagnation, oxygen conditions deteriorated. High concentrations of the gas were measured only in the 4-m thick layer (from 113.5 to 84.0% saturation), decreasing in the deeper layers to reach the zero value at 7 m depth (Table 2). Good oxygen conditions from April until September must have been due to the intensive primary production as confirmed by the deficit of free carbon dioxide and the high reaction (9.02 pH in April, 8.30 pH in September) – Table 3. Simultaneously, organic matter decomposed in the near-bottom water layers due to the continuous thermal stratification, consuming all oxygen and causing its total deficit near the bottom. The intensive mineralization of organic compounds occurred in parallel to an

Table 3

Selected chemical parameters of water of Lake Głtwa

Parameter		Date		
		21 Nov.	29 Apr.	03. Sept.
Reaction (pH)	<i>P</i>	8.12	9.02	8.30
	<i>D</i>	8.00	8.15	7.37
Carbon dioxide ($\text{mg } CO_2 \cdot dm^{-3}$)	<i>P</i>	8.8	0.0	0.0
	<i>D</i>	11.0	11.0	29.0
Conductivity ($\mu S \cdot cm^{-1}$)	<i>P</i>	368	417	321
	<i>D</i>	370	357	476
Chlorides ($\text{mg } Cl \cdot dm^{-3}$)	<i>P</i>	15.0	16.0	16.0
	<i>D</i>	15.0	20.0	19.0
Calcium ($\text{mg } Ca \cdot dm^{-3}$)	<i>P</i>	54.98	57.83	49.98
	<i>D</i>	54.98	65.69	73.54
Magnesium ($\text{mg } Mg \cdot dm^{-3}$)	<i>P</i>	14.0	7.6	7.2
	<i>D</i>	14.0	10.0	21.2
Alkalinity ($\text{mval} \cdot dm^{-3}$)	<i>P</i>	3.1	3.1	2.7
	<i>D</i>	3.1	3.5	5.0
Total hardness ($\text{mval} \cdot dm^{-3}$)	<i>P</i>	4.00	3.57	3.14
	<i>D</i>	4.00	4.18	5.57
Oxidization ($\text{mg } O_2 \cdot dm^{-3}$)	<i>P</i>	11.2	12.8	28.8
	<i>D</i>	12.0	17.6	24.0
BOD_5 ($\text{mg } O_2 \cdot dm^{-3}$)	<i>P</i>	2.1	7.4	6.6
	<i>D</i>	3.2	1.9	4.7

P – surface layer*D* – bottom layer

increase in free carbon dioxide (to $29.0 \text{ mg CO}_2 \cdot \text{dm}^{-3}$ in September) – Table 3. According to ROGALSKI et al. (2005), carbon dioxide is the main product of respiration and matter decomposition processes occurring in the bottom mud. The described distribution of oxygen in the peak of the summer stagnation is illustrated by the so-called clinograde curve, typical for eutrophic lakes.

One of the indicators of excessive water fertility is the low visibility of Secchi disc. Water transparency in Lake Gi³wa ranged from 0.70 to 2.50 m (Figure 2) and oscillated during the vegetation period around 0.8 m. Apparently, the excessive biomass of algae was the limiting factor for sunlight penetration in the lake, as shown by the highest amount of chlorophyll *a* (indicator of the primary production, equal $73.50 \text{ mg} \cdot \text{m}^{-3}$), which occurred simultaneously with the lowest water transparency (0.70 m) – Figure 2.

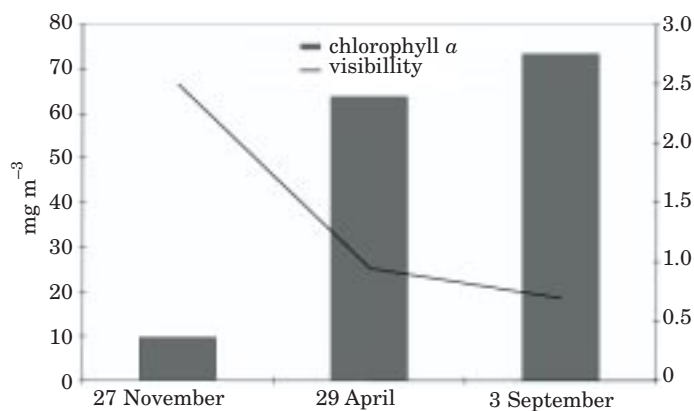


Fig. 2. Chlorophyll *a* content and visibility of Secchi disc in water of Lake Gi³wa

The excessive primary production in Lake Gi³wa was most probably caused by the high concentration of nutrients, which ranged from 2.30 to $12.47 \text{ mg N} \cdot \text{dm}^{-3}$ and from 0.13 to $1.40 \text{ mg P} \cdot \text{dm}^{-3}$ (Figures 3, 4). Such values are typical for highly fertile lakes. The pools of nitrogen and phosphorus were dominated by organic forms (Figures 3, 4), which confirms the high fertility and productivity of the lake (GROCHOWSKA, TANDYRAK 2007). Following the lake classification by ZDANOWSKI (1982), Lake Gi³wa can be classified as polytrophic, i.e. 4th trophic condition degree, in terms of the spring content of total P. According to HILLBRICHT-ILKOWSKA and WIENIEWSKI (1993), who included water transparency, total P and chlorophyll *a* into their classification, Gi³wa is the heavily eutrophic lake.

Assessment of the production processes in a lake is possible through BOD₅ determination. In the surface waters of Lake Gi³wa, the values of that parameter were high, approx. $7 \text{ mg O}_2 \cdot \text{dm}^{-3}$, during the vegetation period, demonstrating fairly advanced eutrophication. At the same time, the permanganate value (BOD₅-Mn), which reveals the reservoir's abundance in

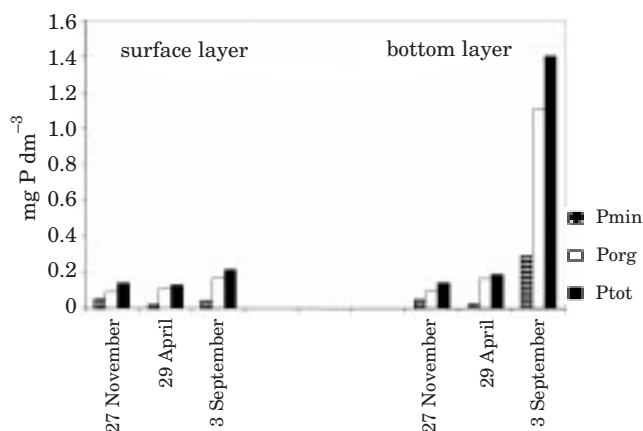


Fig. 3. Changes of phosphorus compounds content in waters of lake Gi³wa

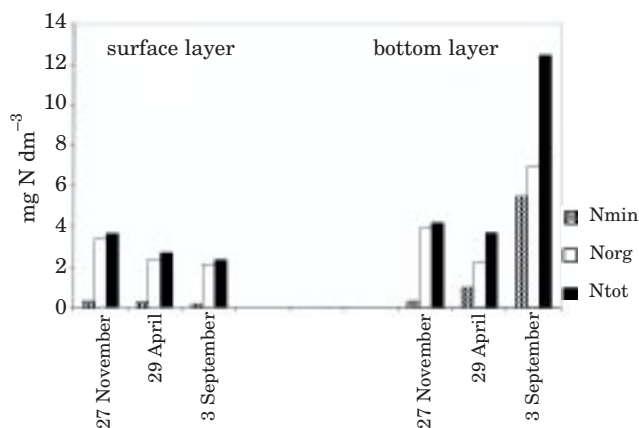


Fig. 4. Changes in the content of nitrogen compounds in water of Lake Gi³wa

allochthonous organic matter, was determined in Lake Gi³wa waters. The values ranged from 11.2 to 28.8 mg O₂·dm⁻³ (Table 3). The ratio between the permanganate value and the BOD₅ was all the time higher than 1.0, ranging from 1.7 to 5.3. Such a ratio indicates the dominance of organic matter resistant to degradation over the easily degradable fraction, which can be attributed to the afforested surroundings of the lake and the influence of the Gi³wa River, which received treated sewage. JANUSZKIEWICZ (1969) argues that afforested watersheds export to the water large amounts of humic compounds resistant to biological decomposition.

OLSZEWSKI and PASCHALSKI (1959), who examined the alkalinity of the Mazurian Lakes, distinguished three groups. The alkalinity of Lake Gi³wa (2.7-5.0 mval·dm⁻³; Table 3) would classify this water body into the 3rd alkalinity group, which means that its water is well buffered. Total hardness of the

water in Lake Gi³wa ranged from 3.14 to 5.57 mval·dm⁻³ (157.1-278.8 mg CaCO₃·dm⁻³) – Table 3. In accordance with the classification by DOJLIDO (1995), the water in Lake Gi³wa is hard. The hardness was mainly determined by the calcium content varying from 49.98 to 73.54 mg Ca·dm⁻³ (Table 3). Despite the forest cover of much of the watershed, the concentrations of calcium measured in the lake were high, which is assumingly due to the wastewater import by the Gi³wa River. KOWALSKI (1997) claims that calcium content in the surface waters is determined by the processes initiated by the presence of organic pollutants imported with wastewater. In the surface water of Lake Gi³wa, the least of calcium was observed during the summer stagnation, in parallel with the maximum chlorophyll a concentration and the lowest water transparency. Such a relationship must be connected to biological decalcification during intensive photosynthesis, which is when lack of free carbon dioxide causes degradation of calcium hydrocarbonate and free CO₂ is released (HÅKANSON et al. 2005). Neutral calcium carbonate thus created settles down and increases calcium content near the bottom. This explanation seems to be confirmed by the present study. The near-bottom water in Gi³wa was calcium-rich (Table 3).

Electrolytic conductivity indicates the degree of water pollution with mineral compounds. MARSZELEWSKI (2005) analysed the electrolytic conductivity of lakes in North Poland and selected a group of eutrophic lakes in which the values of this parameter were from 200 to 400 μS·cm⁻¹. The conductivity of water in Lake Gi³wa ranged from 321 to 476 μS·cm⁻¹ (Table 3), corresponding to the range typical for the lakes of considerable fertility. MARSZELEWSKI (2005) report that in heavily eutrophicated lakes electrolytic conductivity in summer differs along the water column, with the values increasing towards the bottom. In Lake Gi³wa, the conductivity increased with the depth (Table 3). The high electrolytic conductivity of the water in Lake Gi³wa is probably related to the wastewater import.

Chloride ions dissolved in water originate from the ground or arrive with contaminants. According to the classification by OLSZEWSKI and PASCHALSKI (1959), water receiving no sewage contains to 15 mg Cl·dm⁻³. Despite being located in an area lacking a sewage collection system, and receiving treated wastewater from the Gi³wa River, Lake Gi³wa was determined to contain 15-20 mg Cl·dm⁻³ (Table 3), which is only slightly in excess of the above threshold value.

CONCLUSIONS

1. Lake Gi³wa is a 3rd static degree reservoir (PATALAS 1960).
2. The summer oxygen distribution in the water column follows a clinograde curve, which indicates high fertility of the lake.

3. Lake Gi³wa is nutrient rich. The concentrations of nutrients are, for example, 1.4 mg P dm⁻³ and 12.47 mg N dm⁻³.

4. According to the criteria given by ZDANOWSKI (1982), Lake Gi³wa is polytrophic, i.e. 4th trophic state degree, whereas from the guidelines suggested by HILLBRICHT-ILKOWSKA and WIENIEWSKI it can be concluded that it is a heavily eutrophic lake.

5. The water in Lake Gi³wa is well buffered, hard, and considerably rich in calcium.

6. In the water in Lake Gi³wa allochthonous organic matter dominates (the ratio between the permanganate value and BOD₅ higher than 1).

7. The high fertility of the water in Lake Gi³wa is confirmed by the electrolytic conductivity reaching 476 μS·cm⁻¹.

REFERENCES

- DOJLIDO J. 1995. *Chemia wód powierzchniowych [Chemistry of surface waters]*. Wyd. Ekonomia i Ęrodowisko, Bia³ystok (in Polish).
- GROCHOWSKA J., TANDYRAK R. 2007. *Nitrogen and phosphorus compounds in Lake Pluszne*. Arch. Environ. Protect., 33(1): 59-66.
- HÅKANSON L., T. BLECKNER, A. C. BRYHN, S. S. HELLSTRÖM 2005. *The influence of calcium on the chlorophyll – phosphorus relationship and lake Secchi depths*. Hydrobiologia, 537: 111-123.
- HERMANOWICZ W., DO-ÅNSKA W., DOJLIDO J., KOZIOROWSKI B., ZERBE J. 1999. *Fizyczno-chemiczne badanie wody i œcieków [Physicochemical examination of water and wastewater]*. Arkady, Warszawa (in Polish).
- HILLBRICHT-ILKOWSKA A., WIENIEWSKI R. J. 1993. *Trophic differentiation of lakes the Suwa³ki Landscape Park (North-Eastern Poland) and its buffer zone – present state, changes over years. Position in trophic classification of lakes*. Ekol. Pol., 41(1-2): 195-219.
- IRŒ 1964. *Mapa batymetryczna i opracowanie danych morfometrycznych jeziora Gi³wa [A bathymetric map and elaboration of the morphometric parameters of Lake Gi³wa]*. Olsztyn (in Polish).
- JANUSZKIEWICZ T. 1969. *Badania chemiczne Jeziora Klasztorne jako odbiornika œcieków [Chemical analyses of Klasztorne Lake as a reservoir receiving wastewater and sewage]*. Pr. IGW, 5 (3): 43-83 (in Polish).
- KOWALSKI T. 1997. *Wp³yw zanieczyszcze³n organicznych na sk³ad wód [Effect of organic pollutants on water composition]*. Ochr. Ęrod., 2 (65): 33-36 (in Polish).
- KUBIAK J., TÓRZ A. 2005. *Eutrofizacja. Podstawowe problemy ochrony wód jeziornych na Pomorzu Zachodnim [Eutrophication. Basic problems of lake water conservation in Western Pomerania]*. S³upskie Pr. Biol., 2: 17-36 (in Polish).
- LETCHER R. A., JAKEMAN A. J., CALFAS M., LINFORTH S., BAGINSKA B., LAWRENCE I. 2002. *A comparison of catchment water quality models and direct estimation techniques*. Environmental Modelling & Software, 17: 77-85.
- MARSZELEWSKI W. 2005. *Zmiany warunków abiotycznych w jeziorach Polski pó³nocno – wschodniej [Changes in abiotic conditions in lakes of north-eastern Poland]*. Rozprawa habilitacyjna. Wyd. Uniw. Miko³aja Kopernika, Toru³n (in Polish).
- OLSZEWSKI P., PASCHALSKI J. 1959. *Wstępn³a charakterystyka limnologiczna niektórych jezior Pojezierza Mazurskiego [Preliminary limnological characterization of some lakes in the Masurian Lake District]*. Zesz. Nauk. WSR Olszt., 4: 1-109 (in Polish).

-
- OLSZEWSKI P., TADAJEWSKI A., LOSSOW K., WIĘCĘAWSKI F. 1978. *Wstępna charakterystyka limnologiczna niektórych jezior Pojezierza Mazurskiego [Preliminary limnological characterization of some lakes in the Masurian Lake District]. Zesz. Nauk. ART Olszt., 7: 3-81 (in Polish).*
- PATALAS K. 1960. *Mieszanie wody jako czynnik określający intensywność krążenia materii w różnych morfologicznie jeziorach okolic Węgorzewa [Mixing of water as a factor determining the intensity of matter flow in morphologically different lakes near Węgorzewo]. Rocz. Nauk Rol., 77(B-1): 223-242 (in Polish).*
- ROGALSKI L., BÉÉ A., WARMIŃSKI K. 2005. *Emisja dwutlenku węgla z utworów glebowych rekultywowanych osadem ściekowym [Emission of carbon dioxide from soil formations reclaimed with sewage sludge]. Inż. Ekol., 13: 160-161 (in Polish).*
- SCHOONOVER J. E., LOCKABY B. 2006. *Land cover impacts on stream nutrients and fecal coli form in the Lower Piedmont of West Georgia. J. Hydrol., 331: 371-382.*
- ZDANOWSKI B. 1982. *Variability of nitrogen and phosphorus contents and lake eutrophication. Pol. Arch. Hydrobiol., 29(3-4): 541-597.*

